


Additional Information

Standard load: Maximum door weight 120 kg (per pair)

Application: Non-rebated doors, maintenance-free, with fixing screws, adjustable spring moves door automatically.

Receiver: OBJECTA® 3-D receiver types according to chapter 2 with connection size 56 mm (VX).

Section Drawing

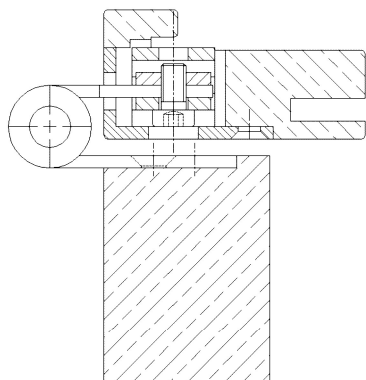

| Item | Finish | PU |
|--------|----------------|----|
| 037670 | Niro gebürstet | 20 |