


**Additional Information**

Standard load: Maximum door weight 200 kg (per pair)  
 Application: Non-rebated doors, maintenance-free, w/fixing screw, detachable when mounted, pivot pins provide additional stability; material thickness **4 mm**, frame part closed according to RC3.  
 Receiver: OBJECTA® 3-D receiver STV115/56; connection size 56 mm (VX).

**Section Drawing**

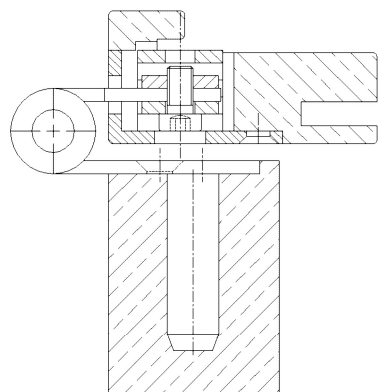

Certified according to



Item	Finish	PU
037616	Niro gebürstet	20