


Additional Information

Standard load: Maximum door weight 120 kg (per pair)

Application: Non-rebated or flush-mount rebated doors with small rabbet depth, maintenance-free, with fixing screws, detachable when mounted.

Receiver: OBJECTA® 3-D receiver types according to chapter 2 with connection size 56 mm (VX).

Section Drawing

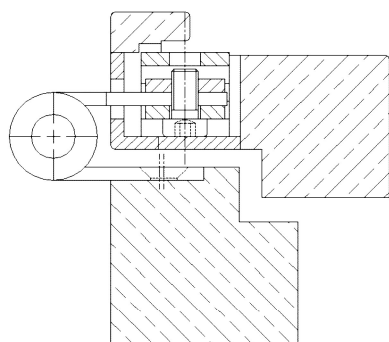

Certified according to



| Item | Finish | PU |
|--------|---------------------|----|
| 037461 | Niro gebürstet | 20 |
| 037467 | satın nickel plater | 20 |
| 037607 | nickel plated | 20 |