


Section Drawing

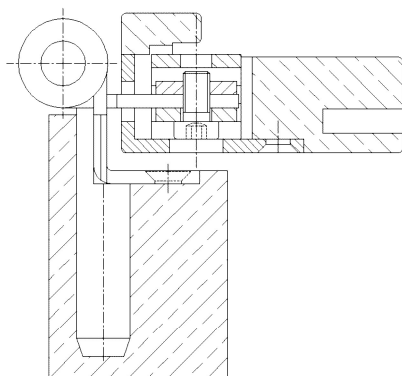

Additional Information

Standard load: Maximum door weight 200 kg (per pair)

Application: Rebated doors, maintenance-free, w/fixing screws, detachable when mounted, security studs provide additional stability; material thickness **4 mm**, frame part closed according to RC3.

Receiver: OBJECTA® 3-D receiver STV115/56; connection size 56 mm (VX)

Certified according to



Item	Finish	PU
036727	Niro gebürstet	10
036728	nickel plated	10
039050	Niro vergoldet	10