


**Additional Information**

Standard load: Maximum door weight 200 kg (per pair)  
Application: Non-rebated doors, maintenance-free, with fixing screw, detachable when mounted; material thickness 4 mm.

Receiver: OBJECTA® 3-D receiver types STV107/48, STV116/48; connection size 48 mm (VN)

**Section Drawing**

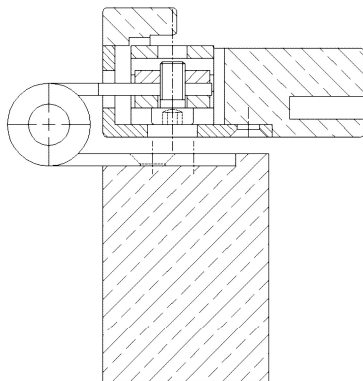

Certified according to



Item	Finish	PU
037593	Niro gebürstet	20