


**Additional Information**

Standard load: Maximum door weight 100 kg (per pair)  
 Application: 3-dimensionally adjustable receiver for non-rebated doors; applicable in wooden frames; can also be mortised into the leaf (alternatively), therefore suitable for extremely small frame breadths  
 Combination: OBJECTA® 2029/120/56 D15, 2029/160/56 D15, 2029/120/56 cr. 15 mm, 2029/160/56 cr. 15 mm

**Section Drawing**

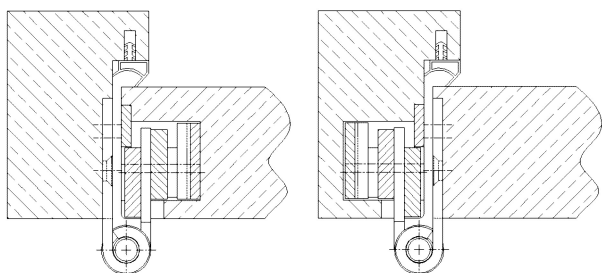

Item	Finish	PU
037813	enox brushed	16
S15077	RAL 9005 matt	16