



**Main Locking Plate, light, non-rebated**

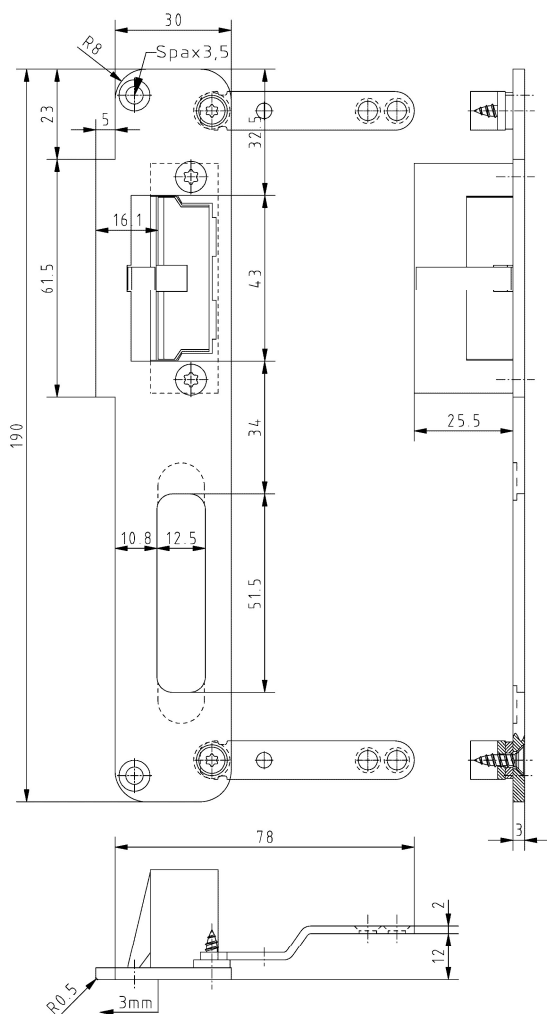

Dargestellt: DIN rechts

**Section Drawing**

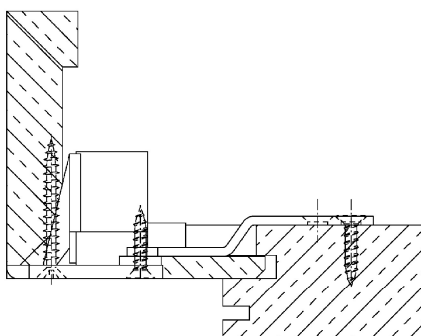

**Additional Information**

System: 1  
 Application: Striking plate system for non-rebated doors, suitable for all DIN locks; with E-Opener, solid striking plate, time factor: 6-24 V AC/DC, continuous operation: 6/12 V AC/DC +/- 15%  
 Note: interlock running-in with 0.5 and 2.5 mm radius  
 Compatibility: Plastic lining with reference A, safety plates with reference A-F

Item	Finish	PU Remark
040292	enox brushed	10 SBL Nr.176 LS R0,5 BS-E-Öffner
040288	enox brushed	10 SBL Nr.176 LS R0,5 STD-E-Öffner
040290	enox brushed	10 SBL Nr.176 LS R2,5 BS-E-Öffner
040286	enox brushed	1 SBL Nr.176 LS R2,5 STD-E-Öffner
040291	enox brushed	10 SBL Nr.176 RS R0,5 BS-E-Öffner
040287	enox brushed	1 SBL Nr.176 RS R0,5 STD-E-Öffner
040289	enox brushed	2 SBL Nr.176 RS R2,5 BS-E-Öffner
040285	enox brushed	10 SBL Nr.176 RS R2,5 STD-E-Öffner