


Additional Information

System: HS
 Application: The safety plate is screwed from the back and can be fixed to the wall if required; the striking plates are screwed into the solid bushings; suitable for heavy duty doors according to RC2 or RC3
 Compatibility: A-H

Section Drawing

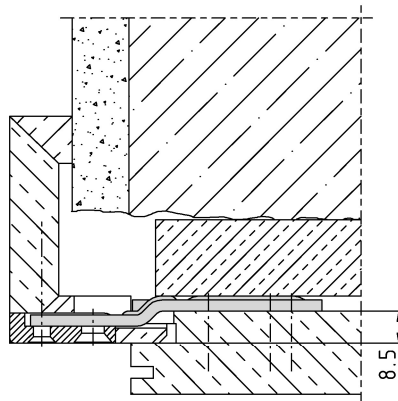

Item	Finish	PU Remark
040096	zinc plated	40 SI-Blech Schließblech 190 mm