


**Additional Information**

Standard load: Maximum door weight 200 kg (per pair)  
 Application: Concealed hinge for non-rebated doors, hinge leaves are mortised into frame and door; 3-dimensional adjustability, maintenance-free bearings; suitable for claddings; magnetically fixed cover plates for optics free-of-screws  
 Accessories: PIVOTA® safety plates for casing frames

**Section Drawing**

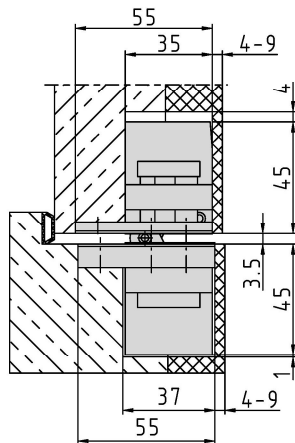

Certified according to



Item	Finish	PU
039516	satin nickel plated	2
041178	simulated SS	2
S15063	RAL 9004	2