
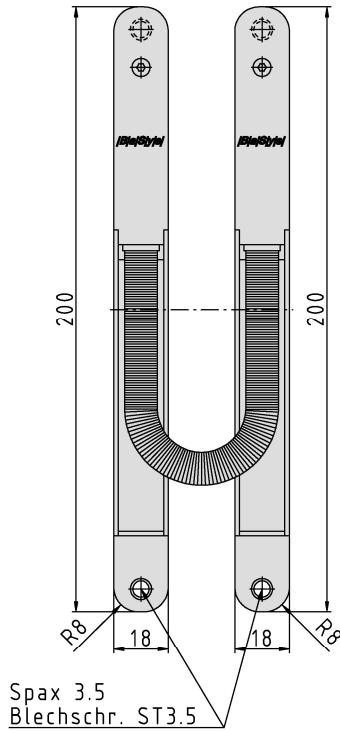



**PIVOTA® "Connect" K**

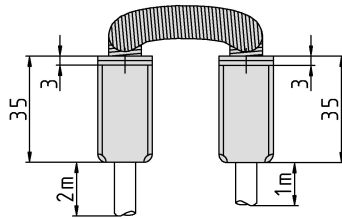

**Additional Information**

- Application:** concealed 8 pole electric wire connection, connector's bodies are mortised into door and frame, one side of the wire can be separated for easy assembly  
**Voltage:** max. 48 V DC  
**Electricity:** max. 3.0 A (0.34 mm<sup>2</sup>)  
**Temperature:** -40°C up to +80°C
- Combination:** to be combined ideally with concealed hinges PIVOTA® DX and PIVOTA® FX
- Variants:** "K" - with cables (like in the picture)  
 "S" - with plugs

**Section Drawing**

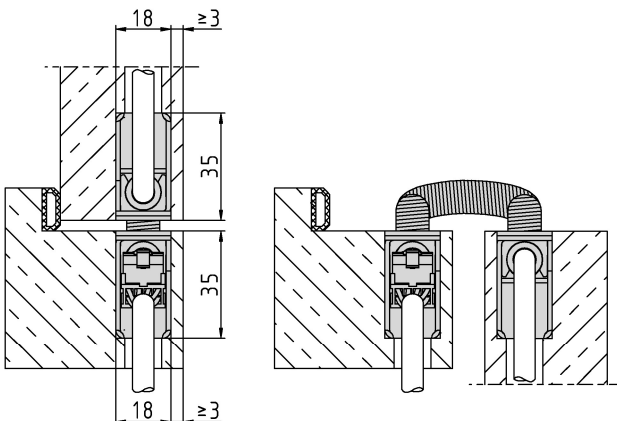

Item	Finish	PU Remark
040341	enox brushed	1 PIVOTA® "Connect" K
041158	enox brushed	1 PIVOTA® "Connect" S